

IMPERIAL COLLEGE LONDON

CHARING CROSS CAMPUS

**DELIVERY AND LOADING GUIDE
FOR SAFE APPLICATION OF MOBILE LIFTING
EQUIPMENT WITHIN THE COLLEGE CAMPUS**

INDEX

1.0 Introduction

2.0 Imperial College Policy requirements

- 2.1 Imperial College requirements
- 2.2 Legislation governing lifting operations
- 2.3 Imperial College Objectives.
- 2.4 Imperial College Liaising
- 2.5 Imperial College Environmental considerations

3.0 Roles and Responsibilities

- 3.1 Imperial College Staff
- 3.2 Imperial College Consultants
- 3.3 Imperial College Duty
- 3.4 Contractor's Staff

4.0 Procedure for Approval of Contractors Lifting Operations

- 4.1 Notification
- 4.2 Information to be provided by Imperial College
- 4.3 Information to be provided by the Contractor
- 4.4 Information to be provided by the Trust
- 4.5 Duties performed by the Lifting Contractor

5.0 Requirements for Campus

- 5.1 General Paved Areas
 - 5.1.1 Ground Bearing Pressure
 - 5.1.2 Inspections
 - 5.1.3 Lifting Procedures

6.0 Guidance Notes

- 6.1 Charing Cross Campus
 - 6.1.1 Access Routes
 - 6.1.2 Service Tunnels
 - 6.1.2.1 Ground Bearing Pressure over Service Tunnels
 - 6.1.2.2 Inspections of Service Tunnels
 - 6.1.3 Exclusion Zones
 - 6.1.4 Basement adjacent to lifting area
 - 6.1.5 Inspection of Basement Walls
 - 6.1.6 Unsuitable Areas
 - 6.1.7 Noise Restrictions
 - 6.1.8 Hazard and Restricted Areas

7.0 Procedure to be adopted prior to lifting operations being approved

- 7.1 Procurement Specification Amendments
- 7.2 Equipment to be lifted – Information Required
- 7.3 Location of Lifting Operation
- 7.4 College Agreement
- 7.5 Imperial College NHS Trust Agreement
- 7.6 Information to be provided

8.0 On the day procedures

- 8.1 College Requirements

- 8.2 Imperial College NHS Trust Requirements
- 8.3 Crane Certification
- 8.4 Lifting Attachments
- 8.5 College Representative's Report
- 8.6 Other Recommendations

9.0 Procedure to be observed during lifting operations

- 9.1 Safety Barriers
- 9.2 Crane
- 9.3 Acceptance by College

Version No	Date	Details	Author
2	June 2020	General Update in respect of the use of Lorry mounted cranes and the use of forklifts and teleporters.	IACW
3	May 2022	To be advised	

1.0 Introduction

The purpose of this document is to protect the staff, students, visitors and general public at Imperial College London (College), their assets and its environs, during lifting operations involving mobile cranes and tower cranes, by Contractors within the confines of the College. This includes the use of truck mounted lifting equipment, hydraulic access platforms, forklifts and teleporters.

This specification defines areas within the College where there are restrictions on the use of lifting equipment, and notifications of hazard areas where it is recommended that no equipment lifting takes place or is only allowed to proceed with additional protection.

The College shall ensure that alternative provisions for means of escape in case of fire are provided, where necessary.

The specification does not apply to the loads on to a public highway, except where over College vaults.

The normal contractual obligations of the Contractor and lifting equipment supplier shall not be reduced by this specification and all lifting operations shall comply fully with the relevant legislation.

The Director of Estates Operations is responsible, on behalf of the College, for agreeing that the lifting operations may take place. The College appointed structural engineer is the person appointed by the College to ensure that the requirements of this document are carried out.

2.0 Imperial College policy requirements

2.1 Imperial College requirements

Imperial College policy is to comply with all current legislation for all lifting operations throughout all campuses. Imperial College also requires all personnel connected with the delivery and lifting operation to be suitably qualified.

2.2 Legislation governing lifting operations

2.2.1 The Health and Safety at Work Act.

2.2.2 Lifting Operations and Lifting Equipment Regulations LOLER.

2.2.3 Construction (Design and Management) Regulations 2007.

2.2.4 The Provision and Use of Work Equipment Regulations (including all amendments and statutory implications). PUWER.

2.3 Imperial College Objectives

2.3.1 The principal objective of Imperial College is to ensure that all lifting operations are carried out in a safe and efficient manner, with minimum disruption to the College Students, Staff and the general public, without increasing the risk to the College Community.

2.4 Imperial College Liaising

2.4.1 The College Building Manager shall liaise with the IMPERIAL COLLEGE NHS Trust Operations manager. The College Building Manager will obtain in writing the Trust's consent for the lifting operations, this consent will be forwarded to the Project Manager.

2.5 Imperial College Environmental considerations

2.5.1 All engines shall be switched off when not in use, for the purposes of bringing into service, lifting operations or de-rigging of the crane and its associated vehicles. This applies to all engine powered equipment.

2.5.2 No vehicle shall be left unattended with the engine running.

2.5.3 No vehicle shall have its engine running when not in service.

2.5.4 All vehicles and mobile plant shall be securely locked when not in use.

3.0 Roles and Responsibilities

3.1 Imperial College staff

3.1.1 Director of Estates Operations

Final responsibility for agreeing the lift operation and date.

3.1.2 Director of Estates Projects

Responsible for all Estates project related lifting operations

3.1.3 Project manager

Responsible for ensuring that all the necessary notifications and consents have been obtained prior to the lifting operation. The College project manager will pass all the information on to the College Appointed Engineer, for their comments. The College Project Manager is responsible for ensuring that the Director of Estates Operations is fully informed in respect of all aspects relating to the specified lifting operation. The College Project Manager shall ensure that all the products/equipment to be lifted has been checked and passed fit for purpose.

3.2 Imperial College Consultants.

3.2.1 The Consultants are responsible for ensuring the specified product is fit for purpose. This includes checking the products/ equipment to be lifted. Contact details will be provided to the College Appointed Engineer in case there are any queries to be raised.

3.2.2 The College Appointed Engineer for the Lifting operation has to ensure that the College parameters are fully complied with and reports directly to the College's Project Manager, the Director of Estates Operations and the Head of Health and Safety-Estates Projects.

3.3 Imperial College Duty

The College Building Manager shall fully inform the Imperial College NHS Trust

Operations Manager and agree lift dates for onward transmission to the College Project Manager.

3.4 Contractor's Staff

3.4.1 The Contractor's site manager shall ensure that all the necessary documentation and consents have been obtained and sent to the College project manager. The Contractor's site manager is responsible for ensuring that the Contractor's safety officer has checked all the necessary documentation prior to the College submission.

3.4.2 The Contractor's safety officer is responsible for the safety of all site lifting operations.

3.4.3 The Contractor's site manager shall ensure that all the requirements for the lifting operation are in place prior to the commencement of the works.

4.0 Procedure for Approval of Contractors Lifting Operations

4.1 Notification

Crane lifting operations	Must be presented, to the Building Manager at least 21 days before the lift is required
All vehicles associated with Crane lifting operations, including the delivery vehicles.	Must be included in the presentation to the Building Manager
Truck mounted cranes delivering building materials.	Two days clear notice to the Building Manager.
Mobile Hydraulic access platforms for maintenance and repair	Must be presented and agreed by the Building Manager at least 21 days before the platform arrives on site
The use of fork lift and teleporters machines to move building materials either around the Campus or to deliver materials.	Two days clear notice to the Building Manager.
Delivery of plant and equipment to the Campus	Two days clear notice to the Building Manager.

Crane lifts should be discussed at the monthly Campus Co-ordination meeting so that they can be coordinated with any other works on-going around the Campus. Any emergency crane lifts should be discussed and agreed with the Director of Estates Operations.

For the Charing Cross Campus any crane lift request should be discussed 21 days in advance with the appropriate Building Manager.

The maximum length of delivery vehicle shall not exceed 12.0m

4.2 Information to be provided by Imperial College

- a) Issue suitable campus plan showing service tunnels and services where necessary to ensure that Contractor has adequate base information prior to ordering the lifting equipment. This can take the form of a whole campus drawing or local sketch of the area.
- b) The College will provide any additional information in respect of College escape routes, lifting over roofs and traffic management as required.

4.3 Information to be provided by the Lifting Contractor

- a) Define the type of lift, i.e. "Basic, Standard or Complex" (*To BS 7121*) and locate possible operations area.
- b) Provide full details of the total works to be carried out, including the procedure to remove the load from the lifting equipment and safely transport it (if required) to the final location. For example, when an item of equipment has to be passed through an opening into the building, how is it transported to its final resting place?
- c) Provide a full and detailed Method Statement for the complete lifting and handling operations at least 14 days prior to the commencement of the lift. This Method Statement, from the Contractor, will contain the following information:-
 - i. Delivery, Size and Type of equipment to be lifted from initial location to final location, including all secondary handling equipment required.
 - ii. The size and type of lifting equipment to be used.
 - iii. Full details of all the vehicles involved including all deliveries.
 - iv. Equipment size, location, outrigger reactions for all lifting equipment, service area required.
 - v. Test Certificates for all the lifting equipment to be used during the lifting operations, are to be provided by the lifting operations Contractor prior to the commencement of the erection and use of the lifting equipment on site.
 - vi. Safe working perimeters in distances around each lifting operation to form part of exclusion zones and materials handling zones for the Contractors delivering the goods. This will include all car parking spaces required. Full details, including protective fencing around the exclusion zone, to exclude all non-essential personnel.
 - vii. A list of competent people involved in the lift, together with their competencies, and the name and phone number of the person who will be in charge of the operation.
 - viii. Confirmation that all the necessary consents for the moving of abnormal loads have been applied for in good time.
- d) Define areas of College to form exclusion and working zones for the lifting operations.

4.4 Information to be provided by the Trust

The College shall send all relevant information to the Imperial College NHS Trust Operations Manager. The Imperial College NHS Trust shall inform the College Building Manager of any site operational restrictions or requirements.

4.5 Duties performed by the Main Contractor

- 1) Define and agree a route for all plant and equipment to enter the College with the Director of Estates Operations.
- 2) Ensure that no other lifting operations are proposed that may block other areas of Imperial College campus roads at the same time. There are circumstances where more than one lift can be accommodated on the same Campus, this is at the discretion of the Director of Estates Operations.
- 3) Ensure that the Director of Estates Operations has full knowledge of the lifting equipment and any implications.
- 4) Ensure that all the components to be erected or placed in position are fit for purpose. This includes all structural steelwork, Plant and all other equipment.
- 5) Ensure that the College has consented to the lift taking place.
- 6) Ensure that the lifting equipment test certificates and insurance documentation are provided to themselves and to the College Appointed Engineer prior to commencement of works.
- 7) Ensure that all the lifting operation and the necessary ancillary works are conducted in a safe and efficient manner and in accordance with the method statement.
- 8) Ensure the lifting zone is enclosed with 1.8m high HERAS fencing.
- 9) Ensure that all deliveries to the Campus are properly managed and have the necessary protection for the personnel about the Campus, this could include the use of low level barriers and, or a Banksman in addition to the plant operator.
- 10) Report back to College on completion as necessary.

5.0 Requirements for Campus

5.1 General Paved Areas

5.1.1 Ground Bearing Pressure

The ground bearing pressure underneath the lifting equipment shall not exceed 200kN/m^2 (2 tons/f^2) in tarmac areas, and shall be reduced to 100kN/m^2 (1 ton/f^2) in areas of brick pavers. Areas of York and Concrete paving slabs shall not be used to provide support for outrigger reactions and are excluded to all wheeled traffic, except pushbikes, college service trolleys

(catering) etc., and similar lightweight equipment. The use of heavily loaded pallet trucks is prohibited, except in circumstances agreed with the Director of Estates Operations. The only permitted exception to this is the access route for vehicles delivering to the rear of the Skempton building.

5.1.2 Inspections

Where applicable, i.e. when lifting equipment outrigger is adjacent to walls, building basements and the service tunnels, an inspection shall be carried out by a College Appointed Engineer at least 3 days prior to the lifting equipment arriving on site and any structural defects noted. These notes should be passed to the College and a decision made by the Director of the Estates Operations as to whether the lift should proceed.

A recommendation for additional temporary propping and safety measures shall be made by the College Appointed Engineer, if necessary.

Upon successful completion of the lift and within three days of the lift taking place, the retaining walls, building basements and the service tunnels shall be re-inspected by the College Appointed Engineer and a report made to the College as required.

5.1.3 Lifting Procedures

On the day of the lift the position and size of spread of pad assemblies shall be checked by the College Appointed Engineer, and no lift shall take place until this check has been carried out. Should the lifting equipment supplier be unable to achieve the specified and agreed spreader plates, the lift shall not take place.

The lifting operations shall be observed by the College Appointed Engineer, to ensure that the lifting equipment positions and routing through the campus are strictly adhered to.

6.0 Campus Guidance Notes

6.1 Charing Cross Campus

6.1.1 Access routes

The materials and lifting equipment shall gain access from St Dunstan's Road for Reynolds Building north of the laboratory block.

For access to the Comparative Biology block use Margravine Road and Claybrook Road.

Note – there is no direct access from Margravine Road to the Reynolds Building for heavy goods vehicles or crane. The deck is for car parking only.

All incoming deliveries of plant and equipment shall fully comply with the instructions issued by Security/Gatehouse on arrival.

Specific Restrictions for Use of Lifting equipment in Various Areas

6.1.2 Service Tunnels

The following requirements must be observed when planning and using heavy lifting equipment adjacent to and over existing service tunnels. No crane outriggers shall bear onto or adjacent to the existing service and walkway tunnels.

6.1.2.1 Inspections of Service Tunnels

When deemed necessary an inspection of the service tunnels shall be carried out by the College Appointed Engineer at least 3 days prior to the lifting equipment arriving on site and any structural defects noted and reported, with recommendations, to the Director of Estates Operations.

Within 3 days of the lift the College Appointed Engineer shall re-inspect the tunnels

6.1.3 Exclusion Zones

The area above the service and walkway tunnels. The pavement in front of the Medical School.

6.1.4 Basement adjacent to lifting area

The existing retaining walls to basements may not have been designed for full HGV loading and it is therefore required to reduce the ground bearing pressure to 100kNm^2 (1ton f²)

6.1.5 Inspection of Basement Walls

When deemed necessary an inspection of the basement walls shall be carried out by the College Appointed Engineer at least 3 days prior to the lifting equipment arriving on site and any structural defects noted and reported, with recommendations, to the Director of the Estates Operations.

Within 3 days of the lift the College Appointed Engineer shall re-inspect the basement walls.

6.1.6 Unsuitable Areas

The Paved Area in front of the Medical School

6.1.7 Noise restrictions

DOES THE IMPERIAL COLLEGE NHS TRUST HAVE ANY RESTRICTIONS?

6.1.8 Hazard and Restricted Areas

In certain hazard areas it is recommended that no lifting equipment lift takes place or is allowed to proceed over these areas until such time as further additional protection is provided, e.g. the gas bottle store adjacent and/or bulk nitrogen stores.

7.0 Procedure to be adopted prior to lifting operations being approved

7.1 Procurement Specification Amendments

Many items of plant have specified lifting or attachment points where the attachment is provided by the manufacturer. Test certificates for these attachments must be provided prior to the machine being delivered on site and the requirement for this information should be contained within the procurement documentation. Clause for procurement specification *“where attachment points are provide by the equipment manufacturer, test certification and, if necessary, test and design information should be provided prior to the order being placed”*. *The equipment shall be delivered with the necessary certification if the lifting attachments are fixed in position and, if not, the specified lifting attachment shall be provided with current test certification.”*

7.2 Equipment to be lifted – information required.

The maximum weight of the unit to be lifted shall be provided, together with any other lifting requirements, in a timely manner to ensure that the lifting operation on site can be carried out successfully. The required test certification for the lifting attachments shall be provided. Full details of the suspension points shall be provided.

7.3 Location of lifting operation

The proposed location for the lifting operation, together with any additional areas that may be required, shall be specified as soon as is practical to the College. This includes obtaining agreement from the College Operations Director to ensure that the necessary precautions are put in place during the crane lift. These can include managing the College fire route, lifting over lightweight roofing, or any other requirements the College may add.

7.4 College Agreements

The final location for the crane and ancillary traffic will be agreed with the Director of Estates Operations as soon as is practical.

The minimum period of notice for a lifting operation using a mobile crane shall be three weeks

Information to be provided:-

- a) Size and type of crane to be used
- b) The maximum out rigger reaction
- c) The size of spreader to be provided
- d) The number of vehicles in attendance
- e) Are there any supporting operations
- f) The anticipated duration of the lifting operations

- g) Is there a requirement for a truck mounted crane for additional lifts?
- h) The location of the Heras temporary enclosure
- j) The route of the load from pickup to final position

The College will confirm that all the necessary safety procedures have been put in place. This includes the following:-

- a) The access and egress routes for the mobile crane is agreed
- b) The access and egress routes have been agreed for all plant deliveries and removal of redundant equipment.
- c) The risk below the moving load is minimised.
For example, where lifting over glazed roofing, there is nobody underneath. No loads to be left suspended for greater than is necessary to ensure safe lifting and placing.

7.5 Imperial College NHS Trust Agreement

No lifting operations shall take place without the written consent of the IMPERIAL COLLEGE NHS Trust Site Manager.

7.6 Information to be Provided

During the week before the lift, ensure that those directing the lifting operation are aware of College requirement to see all the normal safety certificates for the crane and its' lifting equipment. The check of the crane safety certificate will be directly related to the chassis number of the crane (This is the hardest element to change. Plant numbers and vehicle registration plates can be moved from machine to machine).

8.0 On the day procedures

8.1 College requirements

The normal college time restrictions apply. The placing of spreader mats etc. may not rely on the main crane and this can proceed, usually using a truck mounted hydraulic arm with hook, subject to satisfactory test and operator's certificates being available.

8.2 Imperial College NHS Trust Requirements

The Deputy Head of Operations for the Imperial College NHS Trust is Ludvik Mowczan. Email ludvik.mowczan@nhs.net.

The emergency Contact person for the Imperial College NHS Trust is David Cook David.Cook3@nhs.net.

Contact number to confirm when the lifting operation is complete the Charing Cross security phone Number 0203 312 1544

8.3 Crane, Lorry Mounted Crane and Hydraulic Access Platforms, Certification

Before the crane, lorry mounted crane and all other plant with outriggers, including hydraulic access platforms, is allowed to proceed to its final location copies of the relevant test certificates shall be provided for verification by the College Appointed Engineer. The College Appointed Engineer shall check all certificates for lifting equipment and competency certification for all those involved in lifting operations.

8.4 Lifting attachments

Prior to any equipment being lifted, copies of the necessary test certificates shall be provided where attachments or attachment points are provided. This requirement only applies to attachment points. Where the items to be lifted are supported in slings taking the entire load, there is no requirement for additional certification.

8.5 College Representative's Report

At the end of the lift, when the crane has been removed and no damaged to ground apparent, a simple text message shall be given to the Director of Estates Operations. Should there be a requirement to report, this will be issued as soon as is practically possible after the event.

8.6 Other Recommendations

There is currently, in the crane procedures guide, a requirement for all lifting operations to be enclosed in Heras fencing. This requirement must be adhered to. College staff and students will enter any other barrier system and this is unacceptable.

9.0 Procedure to be observed during lifting operations

9.1 Safety Barriers

- 9.1.1 Erect and ensure that the non-essential personnel exclusion zone is satisfactory
- 9.1.2. Ensure that no previously agreed 'as necessary Means of Escape in case of fire' routes are blocked.
- 9.1.3 Do not exceed area agreed with the College for the lifting operations.


9.2 Crane

- 9.2.1 Insurance and Rigging Detail

- 9.2.2 Provide details of insurance, safety certificates, etc. for the lifting equipment to be used.
- 9.2.3 Ensure that the position and size outrigger load spreaders are as per the agreed Method Statement and confirmed by the College Appointed Engineer. When this has been confirmed, the agreed lift(s) may take place.

9.3 Acceptance by College

No lifting operation shall take place within any College Campus until the necessary requirements above have been agreed by the College Appointed Engineer.

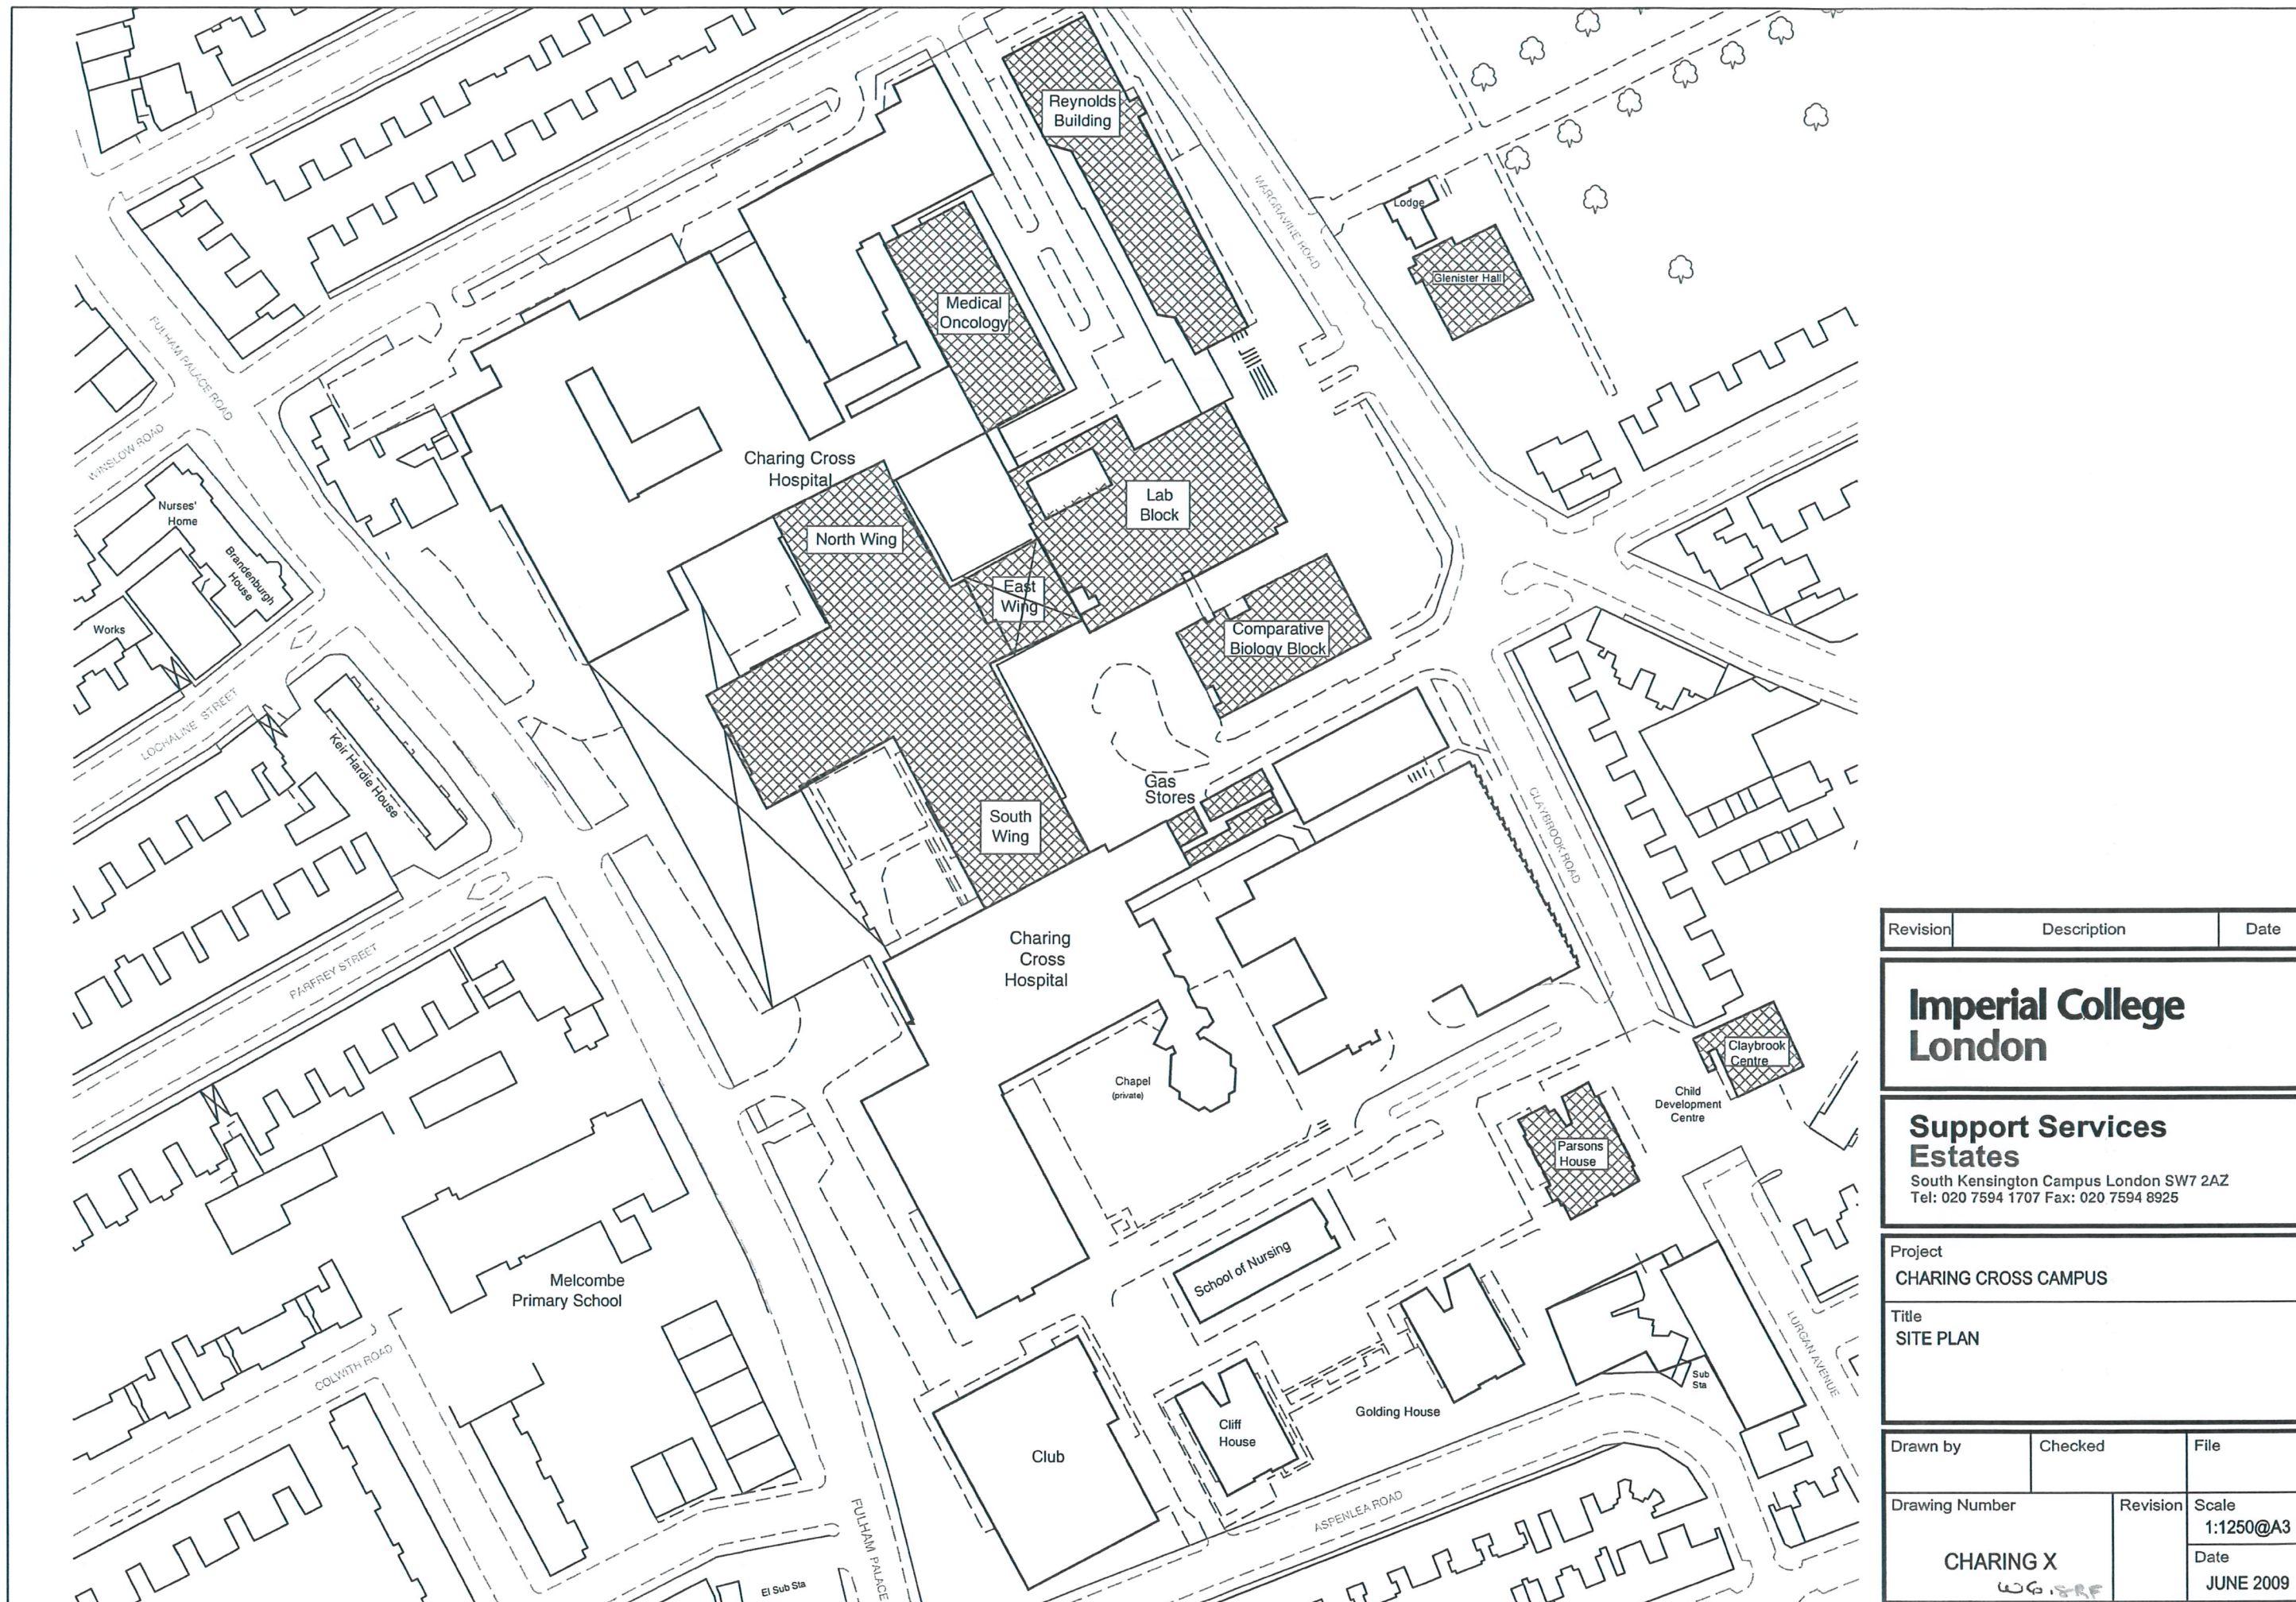

Revision	Description	Date
Imperial College London		
Support Services Estates South Kensington Campus London SW7 2AZ Tel: 020 7594 1707 Fax: 020 7594 8925		
Project CHARING CROSS CAMPUS		
Title SITE PLAN		
Drawn by	Checked	File
Drawing Number CHARING X W G R R		Revision Scale 1:1250@A3 Date JUNE 2009